



# AX1715

## Xtrem skid plate

Rieju MR250 / MR300 Pro

### What's in the box ?

- 4 NE01-02-001 - TFHC 6x16 screws
- 2 NE01-02-002 - TFHC 6x20 screws
- 2 NE01-02-004 - TFHC 6x30 screws
- 3 NE01-04-002 - Clamped bolts
- 5 NE01-04-003 - EM6F bolts
- 3 NE01-03-001 - M6 washers
- 2 NE01-11-001 - Special screws
- 1 PM03-04-120 - Front fixation
- 1 PM01-04-270 - 20mm plastic block
- 1 PM01-06-077 - Linkage plate
- 1 PM01-10-020 - 30mm plastic block
- 1 NE04-01-248 - Sticker



The paper instructions may be limitless, a tutorial video is available online to help you.

Scannez le QR code pour regarder le tutoriel de montage.




# Assembling instructions

Approximate time of assembly: 15 minutes.

A skid plate is made to protect the vital components of your bike and does not have a « life warranty ». However, production default may happen and we cover it during the first year of use.


In case of premature breakage, please write to [contact@axpracing.com](mailto:contact@axpracing.com)

### Follow the steps

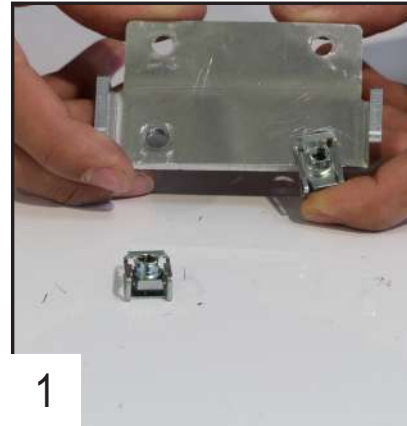


1

Insert the two clamped bolts on the front fixation.

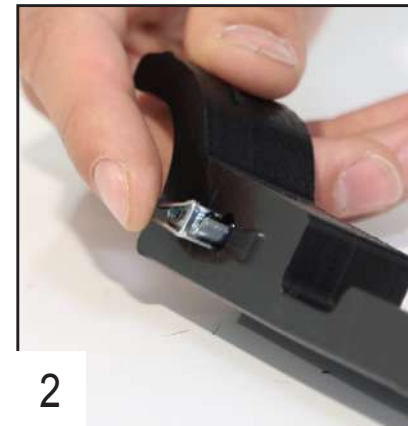

2

Insert the clamped bolt in the 30mm plastic block.

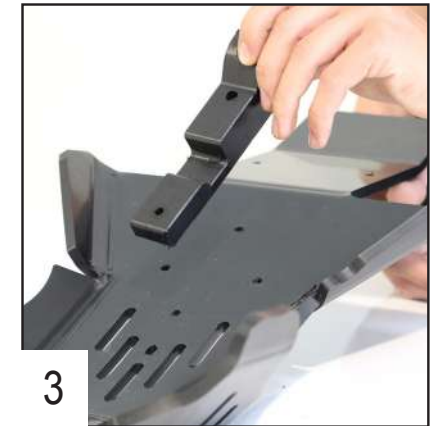


3

Place the 20mm plastic block on the rear part of the plate.




4

Fix the plastic block using a TFHC 6x30 screw + EM6F bolt and M6 washer then tighten.

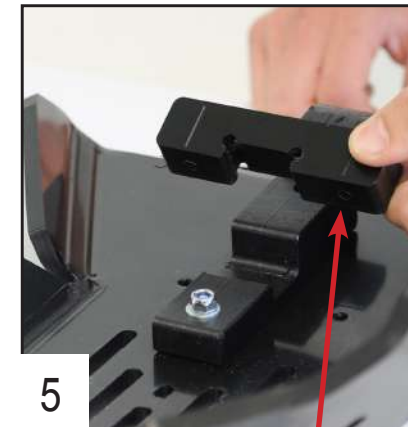

5

Place the 20mm plastic block. Make sure that the longest part is on the right side.

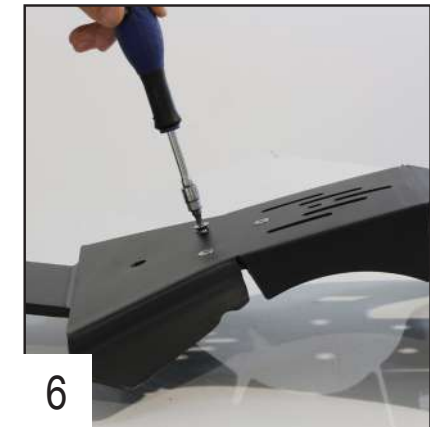

6

Fix the block using 2 TFHC 6x16 screws.



7

Place the TFHC 6x30 screw without tightening it.




8

Place the front fixation on the frame. You can remove the exhaust for an easier assembly (only for the first time).



9

Use the TFHC 6x16 screws + EM6F bolts to fix the front fixation and tighten.

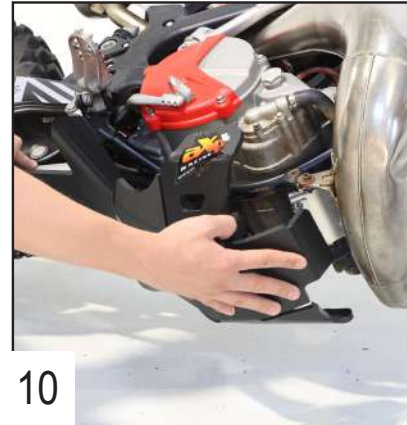

10

Insert the plate on the frame using the hook.




11

Fix the plate using the 2 special screws.



12

Tighten the front screws.

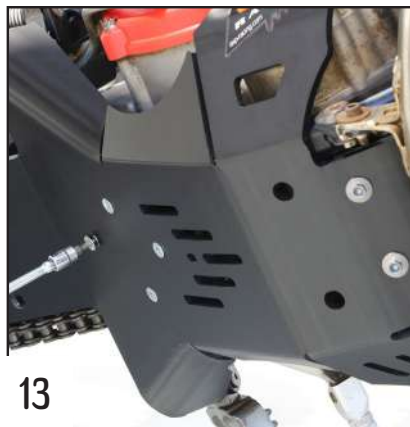


13

And the back screw.



14

Place the linkage plate.

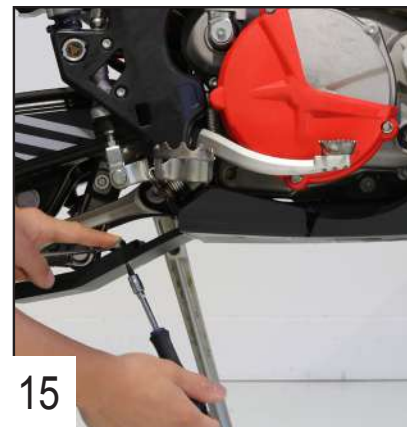

15

Use 2 TFHC 6x20 screws + EM6F bolts and M6 washers to fix the plate. Repeat the operation on the other side.

**You're all ready to ride !**